




MICROMETER ADJUSTABLE TORQUE WRENCHES - DUAL SCALE

Metal Handle Dual Scale. The metal handle series offers the user a rugged, industrial strength torque wrench able to withstand the rigors of professional use. Handles are lightly knurled for a tough, non-slip grip.


Features

- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- Most feature quick release buttons which provide good socket retention as well as easy socket removal
- Accuracy: ± 3% CW ± 4% CCW of indicated value, CW, from 20% to 100% of full scale
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.

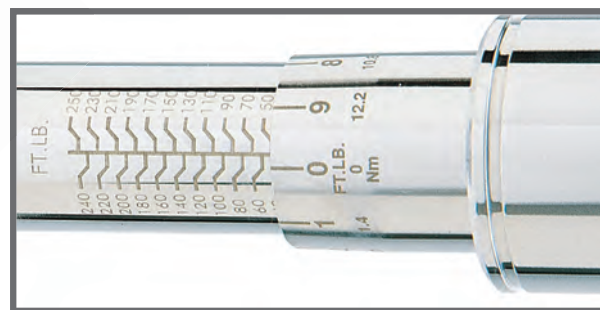

MICROMETER ADJUSTABLE TORQUE WRENCHES - DUAL SCALE

| Product Code | Drive Size | English Range | Incr. | Nm Range | Incr. | A In. | B In. | C In. | D In. | Wt. Lbs. |
|---------------|------------|------------------|-------|-----------------|-------|--------|-------|-------|-------|----------|
| 501MRMH | ¼" | 10-50 in. lb. | 0.5 | 1.4 - 5.4 Nm | 0.5 | 10.15 | 1.06 | 0.93 | 1.06 | 0.85 |
| 1501MRMH | ¼" | 20-150 in.lb. | 05 | 2.8-15.3 Nm | 0.12 | 10.15 | 1.06 | 0.93 | 1.06 | 0.90 |
| 1502MRMH | ⅜" | 20-150 in. lb. | 1 | 2.8 - 15.3 Nm | .12 | 10.15 | 1.06 | 0.93 | 1.06 | 0.90 |
| 2002MRMH | ⅜" | 30-200 in. lb. | 1 | 4.0 - 22.0 Nm | .12 | 10.15 | 1.06 | 0.93 | 1.06 | 0.85 |
| 2502MRMH | ⅜" | 30-250 in. lb. | 1 | 4.0 - 27.7 Nm | .12 | 11.25 | 1.06 | 0.93 | 1.06 | 0.95 |
| 7502MRMH | ⅜" | 100-750 in. lb. | 5 | 14.1 - 81.9 Nm | .6 | 16.00 | 1.43 | 1.20 | 1.40 | 2.50 |
| 10002MRMH | ⅜" | 150-1000 in. lb. | 5 | 19.8 - 110.2 Nm | .6 | 16.00 | 1.43 | 1.20 | 1.40 | 2.50 |
| 25003MRMH | ½" | 300-2500 in. lb. | 10 | 39.6 - 276.9 Nm | 1.2 | 18.00 | 1.70 | 1.40 | 1.40 | 3.20 |
| 752MFRMH | ⅜" | 5-75 ft. lb. | 0.5 | 10.2 - 98.3 Nm | .7 | 16.00 | 1.43 | 1.20 | 1.40 | 2.50 |
| 1002MFRMH | ⅜" | 10-100 ft. lb. | 0.5 | 16.9 - 132.2 Nm | .7 | 16.00 | 1.43 | 1.20 | 1.40 | 2.55 |
| 1503MFRMH | ½" | 20-150 ft. lb. | 1 | 34 - 197 Nm | 1.4 | 19.00 | 1.70 | 1.40 | 1.40 | 3.15 |
| 2503MFRMH | ½" | 30-250 ft. lb. | 1 | 47 - 332 Nm | 1.4 | 24.40 | 1.70 | 1.40 | 1.40 | 3.15 |
| 4004MFRMH | ¾" | 80-400 ft. lb. | 5 | 85 - 491 Nm | 3.4 | 34.25 | 2.50 | 2.10 | 1.40 | 10.30 |
| 4504MFRMH | ¾" | 75-450 ft. lb. | 5 | 119 - 593 Nm | 3.40 | 34.25 | 2.50 | 2.10 | 1.40 | 10.30 |
| 6004MFRMH | ¾" | 100-600 ft. lb. | 5 | 169 - 779 Nm | 6.8 | 42.00 | 2.50 | 2.00 | 1.15 | 11.85 |
| 10005MFRMH* | 1" | 200-1000 ft. lb. | 5 | 305 - 1322 Nm | 6.8 | 70.00 | 3.00 | 3.00 | 1.50 | 25.10 |
| 20005MFMHSS** | 1" | 300-2000 ft. lb. | 10 | N/A | N/A | 108.50 | 3.15 | 4.25 | 1.65 | 48.75 |

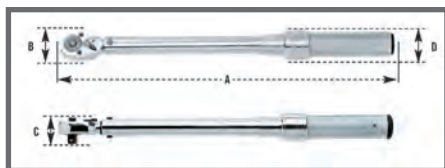

*NOTE: 10005MFRMH supplied with one extension handle and is packed in a metal box.

**NOTE: 20005MFMHSS (English scale only) supplied with two extension handles, fixed/non-ratcheting head and is packed in a sturdy cardboard box.